

Character OLED displays

Character LCD compatible instructions,
pinout, and sizes

No backlights: thin designs

Single 3V ~ 5V power supply

Color options - Yellow, Green, Blue,
more coming soon

Wide operating temp: -40 °C to +80 °C

Wide viewing angles: $\geq 160^\circ$


Fast response time: 10 μ s

High contrast ratio: 2000:1

Serial or Parallel interfaces: jumper selectable

Built-in font tables supports:

English, Russian, Hebrew, Japanese, Greek, Germanic, Romance

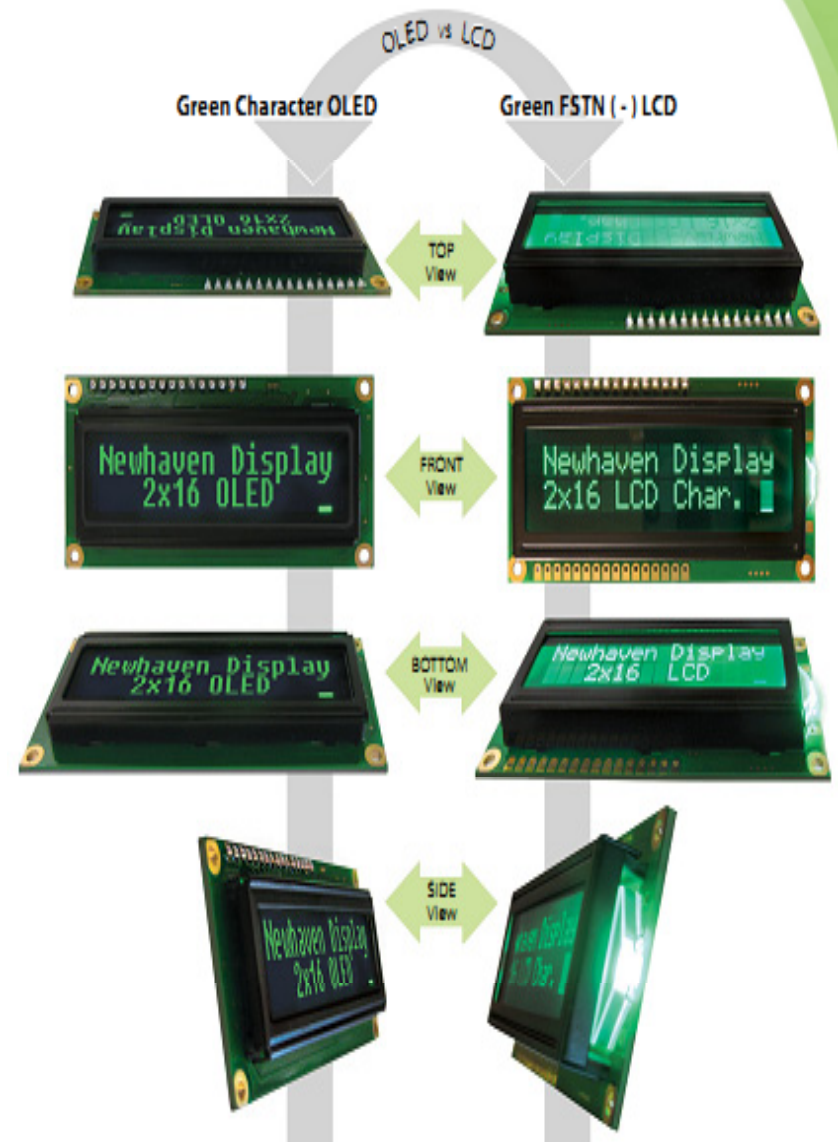

Graphic OLED displays

Attached PCB for easy mounting and connection

Single low-voltage power supply

Color options - Yellow, Green, Blue
more coming soon

No backlights: thin designs

Serial or Parallel interfaces

Wide viewing angles: $\geq 160^\circ$

Fast response time: $10\mu\text{s}$

High contrast ratio: 2000:1

Wide operating temp: -40°C to $+85^\circ\text{C}$

Example code available

